


JOB NO. 11265

KINLOSS ABBEY

03/02/15

REQUIREMENTS:

1. INSTALL SLINGHOP SOLDIER PROPS BELOW THE LINTELS IN THE DOORWAYS AT THE BASE OF THE TOWER.
2. ERECT AN INDEPENDENT TOWER SCAFFOLD INSIDE & OUTSIDE THE TOWER TO REPAIR THE LARGE OPENING IN THE MASONRY BESIDE THE DOOR.
3. INSTALL WIRE ROPES AROUND THE CIRCUMFERENCE OF THE TOWER @ MID-POINT & TENSION THEM WITH TURNBUCKLES.
4. ERECT AN INDEPENDENT CUPOLK SYSTEM SCAFFOLD AROUND THE TOWER TO THE FULL HEIGHT INSIDE & OUTSIDE.

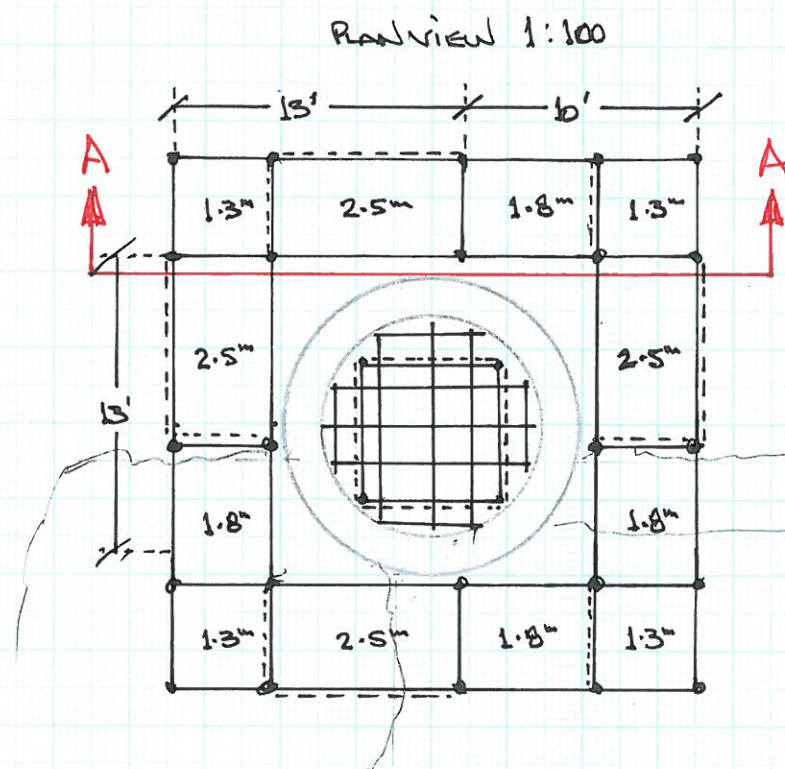

PROPOSED SCAFFOLDING LAYOUT
BOARDING & BRACING SEQUENCE

WIRE ROPES :-

26m of S.W. ROPE x 20mm WITH
BREAKING LOAD OF 20 Tc/Length.


2nd TURNBUCKLES TO SUIT

2 x GUSSET THIMBLES


12 x 20mm BULLDOG CLIPS

MATERIALS :-

- 28 x JACKS & BASES
- 84 x 3" STANDARDS
- 92 x 2.5m LEDGERS
- 72 x 1.8m "
- 164 x 1.3m "
- 64 x 1.3m INTER. TRANSOMS
- 16 x FACADE BRACES
- 24 x LEDGER "
- 96 x 13' BOARDS
- 80 x 10' "
- 48 x 6' "
- 48 x 4' "
- 32 x 8' "
- 2 x 7m LADDERS
- 2 x 5m "
- 8 x LADDER GATES
- 40 x 2' TUBES
- 16 x 3' "
- 12 x 4' "
- 8 x 8" ALLOY BEAMS
- 24 x 6' TUBES
- 144 x DOUBLES
- 48 x SWIVELS
- 100 x PINGLES

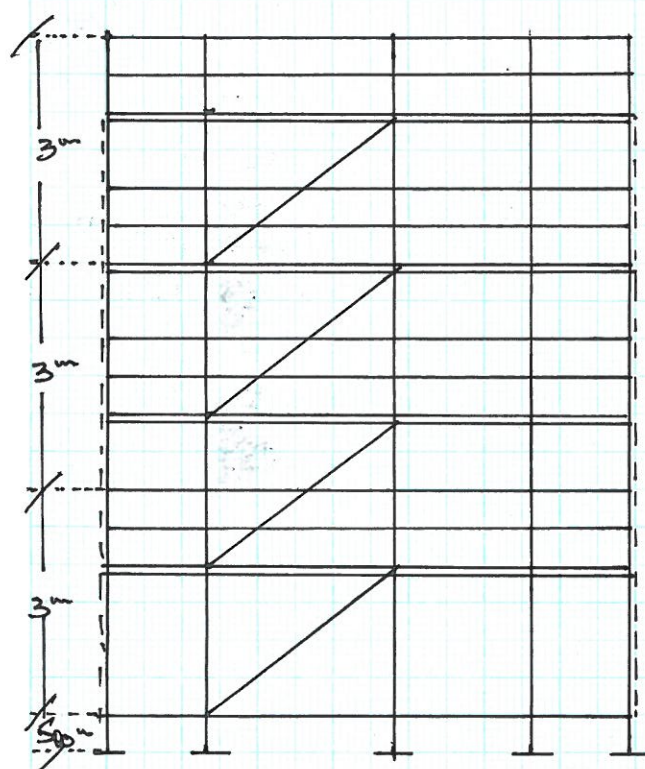

SECTION A-A 1:100

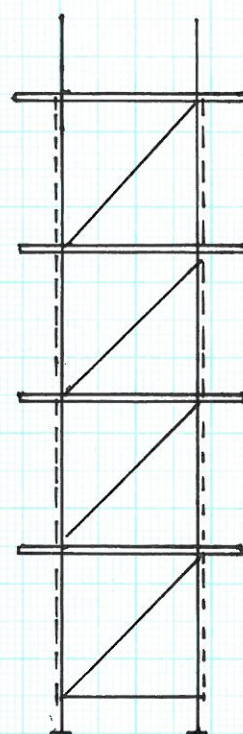

INTERNAL TOWER
1:100

WEIGHT = 10.67 Tc